

REVERSE OSMOSIS 5 STAGES MOD. EUR-50

REFERENCE: GS100015.0 EAN: 8436023843058

Ultra-low rejection (50% water saving).

Filters with double safety seal.

Without interconnection fittings.

Plastic coated tank.

Working pressure control.

Without electricity.




Technical Data

Pressure	3 bar min. – 5 bar max.
Max production	200 L / Day
Tank Capacity	10 Liters
Rejected water per L produced	2-3 Liters
Maintenance	Change cartridge every 12 months



Dimensions:

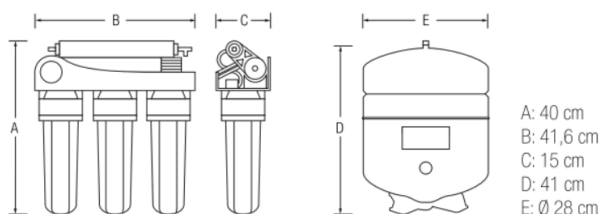

Conditioning: 4 units



SERVICIO TÉCNICO NACIONAL **93 783 33 92**

Síguenos en:



www.bbagua.com



* Las imágenes que se muestran pueden diferir del producto.